



FIAMM

Industrial Batteries

FGH

series

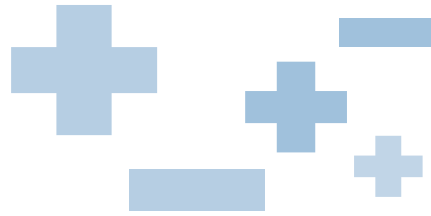

Valve Regulated lead-acid batteries

- + Special design for **UPS application**;
- + Suitable also for Security Systems, toys and light traction application;
- + Top performance for High rate discharge;
- + High consistency and reliability;


Case Material: ABS UL-94 (V0 flame retardant on demand)

Life Expectancy: 5 years according to Eurobat standards


Model	Nominal voltage (V)	Capacity (Ah) Discharge 20 h rate 1.75V/cell.	Weight (gr)	Dimensions (mm)				Internal Resistance (of full charged Battery)	Max discharge current 5" (A)	Temp. (°C)			Charge Voltage (V)		Max charge current (A)	Terminal Type
				L	W	H	TH			Charge	Discharge	Storage	Float Use	Cyclic Use		
12FGH23slim	12	5.0	2000	151	51	94	99	37 mΩ	75	0 ÷ 40	-20 ÷ 50	-20 ÷ 50	13.5 ÷ 13.8	14.4 ÷ 14.7	1.25	FAST-ON 4.8
12FGH23	12	5.0	2000	90	70	101	107	37 mΩ	75						1.25	FAST-ON 6.3
12FGH36	12	9.0	2800	151	65	94	99	23.6 mΩ	135						2.25	FAST-ON 6.3
12FGH50	12	12	4200	151	98	94	99	14.8 mΩ	180						3.00	FAST-ON 6.3
12FGH65	12	18	6400	181	76	167	167	9.8 mΩ	278						4.50	FLAG Ø 5.5

Terminal Type


12FGH23




■ Faston 6.3




12FGH23slim




■ Faston 4.8




12FGH36



■ Faston 6.3




12FGH50




■ Faston 6.3



12FGH65



■ Flag M5



SSLA Products

FGH series

Constant Power discharge table (Watts per bloc)

Temperature: 25°C

12FGH23

Final Voltage	5 min	10 min	15 min	20 min	30 min	45 min	1 hour
1.6 V/Cell	229	172	135	110	80.9	57.3	44.5
1.67 V/Cell	232	174	136	111	81.6	57.7	44.7
1.7 V/Cell	230	173	136	111	81.3	57.5	44.6
1.8 V/Cell	218	167	131	107	77.4	55.1	42.8

12FGH36

Final Voltage	5 min	10 min	15 min	20 min	30 min	45 min	1 hour
1.6 V/Cell	407	285	217	176	129	92.0	68.4
1.67 V/Cell	403	283	215	174	128	91.5	68.0
1.7 V/Cell	400	281	213	173	127	90.9	67.5
1.8 V/Cell	384	268	203	166	123	88.6	65.6


12FGH50

Final Voltage	5 min	10 min	15 min	20 min	30 min	45 min	1 hour
1.6 V/Cell	529	371	282	228	167	120	89.0
1.67 V/Cell	525	368	279	226	166	119	88.4
1.7 V/Cell	520	365	277	224	165	118	87.8
1.8 V/Cell	500	349	264	216	160	115	85.3

12FGH65

Final Voltage	5 min	10 min	15 min	20 min	30 min	45 min	1 hour
1.6 V/Cell	672	459	350	288	215	160	129
1.67 V/Cell	643	446	342	283	212	158	127
1.7 V/Cell	627	439	339	281	211	157	127
1.8 V/Cell	577	418	327	272	206	154	124

Battery Components

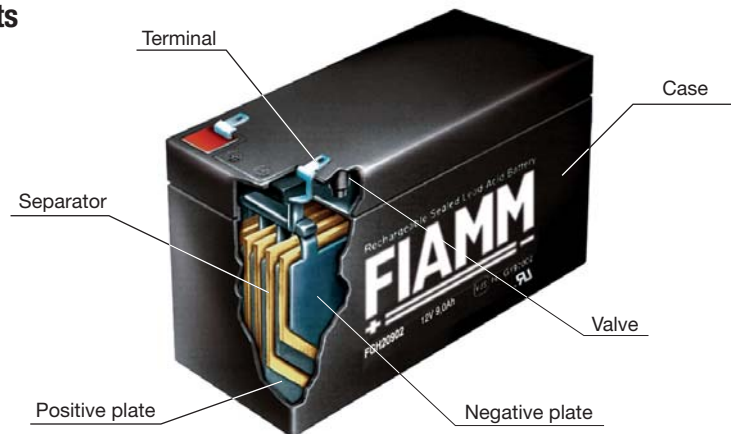

FIAMM reserves the right to change or revise without notice any information or detail given in this publication
FGH_Vers.2_2010/01/25

FIAMM S.p.A.
Industrial Batteries Business Unit
SSLA Products
www.fiamm.com
email: info.standby@fiamm.com

FIAMM

Industrial Batteries